

PREMIUM SEALERS



PLATINUM


EXTREME DUTY GLOSS



www.sealers.com.au | 1800 779 007



PREMIUM SEALERS

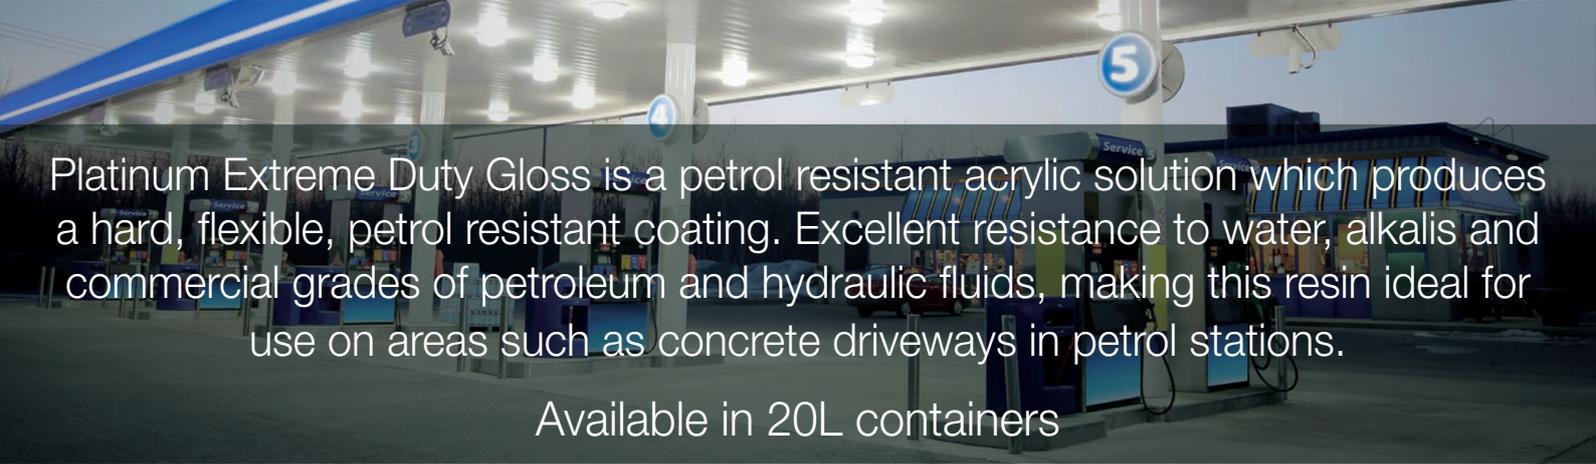

Platinum Extreme Duty Gloss is a petrol resistant acrylic solution which produces a hard, flexible, petrol resistant coating. Excellent resistance to water, alkalis and commercial grades of petroleum and hydraulic fluids, making this resin ideal for use on areas such as concrete driveways in petrol stations.

Available in 20L containers

USES

Mainly used for the sealing of Exposed Aggregate, Limestone, Pattern Concrete and most types of paving, in order to help protect against dirt, mould, oil, petrol, tyre marks and other visible build up.

Platinum Extreme Duty Gloss is a “wet look” sealer suitable for application around salt and chlorinated pools.

Platinum Extreme Duty Gloss is recommended for external uses only due to odour.

SURFACE PREPARATION

All surfaces need to be completely clean and free of all debris and foreign matter prior to sealing. Pressure cleaning is advisable as the first coat is the ‘key’ for the over coat and needs to penetrate a clean surface for good adhesion.

Once the surface is cleaned the concrete must be allowed to completely dry.

This usually takes a few days of good weather You shouldn't see any moisture bleed coming from control cuts or sides of the area or any visible moisture tones from retic etc. If this is the case DO NOT PROCEED.

APPLICATION

It is recommended you perform a test on a small area before full application, to test desired effect.

Application is best achieved by rolling using a lambswool (solvent

resistant) cover. A 230mm cover and frame is recommended for best control. Solvent resistant soft brooms are also effective. An airless sprayer is also recommended when used by an experienced applicator.

- 1st coat should be thinned at a ratio of 1L of “xylene thinners” per 5L of Platinum Extreme Duty Gloss. Only proper thinners should be used.
- 2nd coat can be applied neat or thinned.
- Apply 2nd coat in the opposite direction to 1st coat.

DO NOT apply In the heat of the day (over 35° and under 10°). This may lead to accelerated curing which can then lead to a light and dark type appearance once dry. Cool mornings and afternoons are ideal application times, especially the first coat.

DO NOT apply if rain is imminent.

A minimum of 2 hours should be allowed between coats prior to applying the second coat.

A slip resistant additive is recommended for sloping surfaces and smooth surfaces likely to become wet from time to time. Platinum Extreme Duty Gloss does reduce the rolling resistance of surfaces it is applied to and adding